

Stair Nosing

- Built to be Walked on
- Non-Slip
- Tactile with Visibility



Handrails

- Flat or Curved
- Heavy Duty
- Long Lasting



Signage

- EXIT or Pictogram
- Install on Wall
- Customise Available




Demarcation

- Install on Wall
- Permanent Install
- Built to Last



Access Tile+ Detectable Warning Surface

- Hazard Tile
- Directional Tile

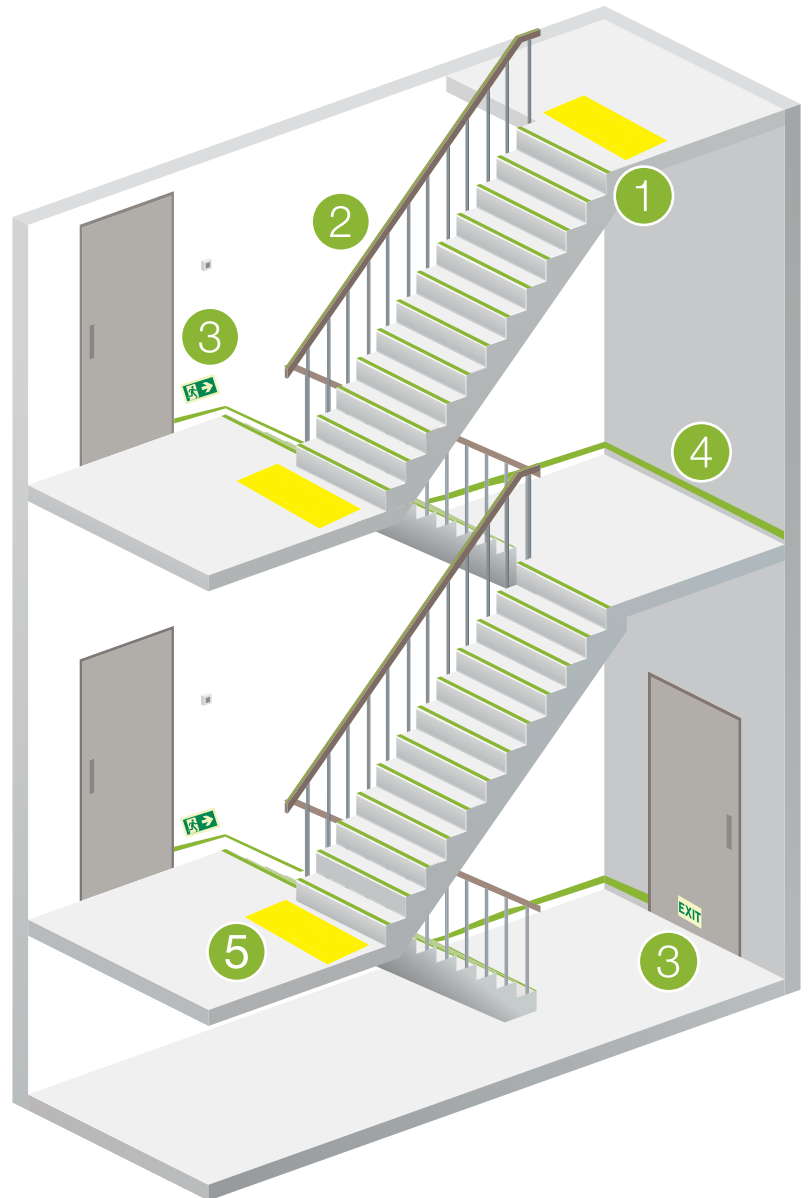

Ecoglo will be happy to assist you with a solution to comply with:

• **BCA Code on Accessibility in the Built Environment 2019**

Clause 4.11.2 Step profile

Clause 4.11.3 Detectable warning surfaces

• **Code of Practice of Fire Precautions in Building 2023**

Clause 8.1.8 Photoluminescent Marking

Clause 9.1.7.j Provision for emergency directional signs/generator

• **Code of Practice of Fire Precautions in Rapid Transit System 2022**

Clause 8.1.8 Photoluminescent Marking



Established in New Zealand in 1997, Ecoglo designs and manufactures photoluminescent (PL) exit signs and emergency visibility products using High Temperature Curing (HTC) technology to integrally bond the photoluminescent polymers onto an aluminium base. This results in products with very high light storage capabilities and unparalleled durability.

There are many ways to become more environmentally friendly and one of these is to endeavour, wherever possible, to use new technology products that are more sustainable.

As well as reducing electricity usage, Ecoglo HTC products incorporate recycled aluminium, are non-toxic and non-radioactive. Being very durable they will last the life of the facility and can then be readily recycled.

Cost Effective · Failsafe · Sustainable

By harvesting sunlight or recycling the existing light in a building, Ecoglo PL products provide sustainable and cost effective emergency lighting solutions. The solutions are fail-safe, operate immediately and will last the life of a building.

Ecoglo products can be seen in many international facilities around the world including Melbourne Cricket Ground, New York's Jazz at Lincoln Center, Toronto's Eaton Centre, London's Bond St Underground Station and Dubai's 160 floor Burj Khalifa.

Countries that have already adopted PL technology into their respective building codes include the USA, Canada, Australia, Japan and New Zealand.



Our Mission

2024 Ecoglo Catalogue

Our mission is to manufacture durable products which create a safe and efficient pedestrian environment providing all people the ability to navigate safely and efficiently in a built environment.

By fulfilling the needs of facility owners, architects, engineers and general contractors to meet the requirements of BCA Code on Accessibility in The Built Environment and Fire Code, our products improves the quality of the building infrastructure and ensures a safe passage from public and private facilities.

Ecoglo strives to provide building products that not only create a safer environment but also meet the demand for an effective and long term solutions.

Remember with Ecoglo, you'll never miss a step!



No Ecoglo - Lights On



With Ecoglo - Lights On



With Ecoglo - Lights Off

Slips and falls on stairs are a burden on both the injured and society as a whole. Stairs become more difficult as vision deteriorates with age or mobility is restricted by vision impaired. Ecoglo has developed a range of Stair Nosing with Nosing Strip provides compliance for step edge contrast requirements in the BCA Code on Accessibility in The Built Environment. Ecoglo has a unique automated process that applies and then bakes in non-slip and Photoluminescent powders. The 180°C heat applied integrally bonds the powder to the aluminium meanings thousands of people can walk on Ecoglo Stair Nosing products thousands of times.



Slip Resistance Testing:

Ecoglo Nosing Strips have a slip-resistance classification:

AS/NZ 4586-2013: Wet Pendulum Classification P5

SS 485:2011: Wet Pendulum Classification V /

Dry Floor: Classification F



Introducing the Visibility Better Solution in a Built Environment.

Ecoglo is a leading global innovator of UL certified photoluminescent egress markings, exit signs and emergency signage that exceed worldwide code requirements.

Ecoglo products are manufactured using a patented process which produces are fast-charging and long-lasting photoluminescent performance that is UV stable and highly durable.

Ecoglo products will enhance safety in a built environment to prevent slips and fall in all light condition and are used for these purposes:

- Every day **reduction of slips and falls** through the provision of step edge contrast;
- Better **step edge contrast** in all situations whether light, dark, or dimly lit;
- Improve orientation & wayfinding for the **visually impaired**;
- Increase **safety & security** preparedness with failsafe emergency lighting.

ROUGH

The hard wearing silicon carbide non-slip material is just what you need to reduce slips and falls in all weather conditions. With their UV resistance and good looks, you can confidently install Ecoglo products inside and out.

TOUGH

Our patented process bakes in the photoluminescent powder and non-slip material and you get to savour the results. Thousand of people can walk on these products thousands of times with no wear and tear. And just to make sure, we've put them through extensive testing at international accredited laboratories relating to durability, weather resistance, UV resistance, stain resistance, abrasion and cleaning. And they passed with flying colours.

SEEN

The photoluminescent strip is activated by natural or artificial light and then emits a steady glow guiding people safely up steps and through passages in all conditions. The combination of the photoluminescent strip and the anti-slip mat provides superior step edge definition whether you are in a fully lit, dim or completely dark environment. When people are confident of where the edge of the step is and in what direction to travel, movement is faster and easier.

GREEN

Ecoglo goes green by using a carbon neutral energy supplier and recycled aluminium.

Ecoglo's Products are awarded the Singapore Green Building Product Certification from the Singapore Green Building Council.

All products are non-toxic and non-radioactive. Designed to last the life of your facility, Ecoglo avoids maintenance costs.



≡ NOSING STRIP

Ecoglo Nosing Strip are designed to ensure visibility of steps and will be effective in all light conditions. Ecoglo Nosing Strip comes in two forms – N Series and E Series. The N Series Non-Slip Strip is a highly durability non-slip product designed to clearly define the step edge while the E Series Photoluminescent & Non-Slip Strip has both the non-slip mat and the photoluminescent strip that is visible for many hours after the lights go out, having charged from sunlight or artificial light. The non-slip colour options are Yellow, Grey or Black.

≡ STAIR NOSING

Ecoglo Stair Nosing are designed to create a highly visible step edge to reduce falls and enhance egress speed in all situations whether light, dark or dimly lit. The aluminium stair nosing have an insert of 51 mm Nosing Strip adhesively fixed into the extrusion and is fitted onto the edge of the step to create an aesthetically pleasing edge. The photoluminescent strip is visible for many hours after the lights go out, having charged from sunlight or artificial light. The anti-slip mat provides all weather protection from slips and falls.

Ecoglo stair nosing are available in various extrusions and can be used on a range of substrates including concrete, timber, tiles, vinyl, steel, checker plate and steel grating. The anodising colour options are Natural (Silver), Black or Dark Permak (Bronze).

≡ PHOTOLUMINESCENT SIGNAGE

Ecoglo Photoluminescent Signage are designed to be used in and about buildings to identify escape routes to meet Singapore Fire Code 2023 Clause 8.1.8 as well as Building Codes in New Zealand, Australia and any performance based jurisdiction around the world.

Ecoglo's high visibility and durability ensure that the signs can be installed in any environment, indoors or outdoors. As long as there is sufficient natural or artificial light to charge the signs then a system can be engineering to meet building code performance specifications.

All Ecoglo Photoluminescent Signage products are high visibility products with resilience to be installed in any environment includes indoor/outdoor as well as installation onto floors and walls. And it is visible for many hours after the lights go out, having charged from sunlight or artificial light. Ecoglo Photoluminescent Signage can aid existing electrical systems as they are failsafe, operate immediately and if placed low will assist egress in smoke filled rooms.

≡ AISLE MARKERS AND SEAT NUMBERS

Ecoglo's highly visibly Aisle Markers and Seat Numbers guide visitors to their seats. Working equally well in light, dark and dim conditions they reduce the disruption to others, increase the efficiency of ushers and make it easier to visit the concessions or other facilities.

The Photoluminescent material will be highly visible for access, yet will not disrupt the performers from the stage. It will remain visible for the length of a performance (concert, movies, etc.). Directional instructions or icons can be installed to provide more efficient egress.

DETECTABLE WARNING SYSTEMS

With more than 20 years of leading research insights and progressive product development experience, Access Products Inc. has combined proven Fibreglass reinforced Polymer Composite processing and material technologies with innovative and intelligent design features to create the ultimate in detectable warning tiles.

Our tactile tiles are cost-effective and hard wearing, providing you with tactile ground surface indicators (TGSIs) that do the job.

The Access Tile Tactile system can be used for train stations, public platforms, access ramps, pedestrian crossings, within educational institutions, recreational facilities, hospitals, commercial sites or areas requiring a non slip surface.

Depending on your project, choose from Cast in Place Tactile Tiles or Surface Applied Tactile Tiles. Both versions of our tactile ground surface indicators are fully replaceable. The colour options are Yellow, Black or White.




Fluorescent Charging of Ecoglo Photoluminescent Material

20 LUX, 4000K in a Poorly Lit Area	
Activation Time	Hours of Visibility
5 minutes	0.50 hours
10 minutes	1.00 hours
20 minutes	2.25 hours
30 minutes	3.00 hours

150 LUX, 4000K in a Reasonably Lit Area	
Activation Time	Hours of Visibility
5 minutes	2.50 hours
10 minutes	4.00 hours
20 minutes	6.00 hours
30 minutes	7.00 hours

300 LUX, 4000K in a Well Lit Area	
Activation Time	Hours of Visibility
5 minutes	4.00 hours
10 minutes	6.00 hours
20 minutes	7.00 hours
30 minutes	8.00 hours

Ecoglo Brightness Decay Curve

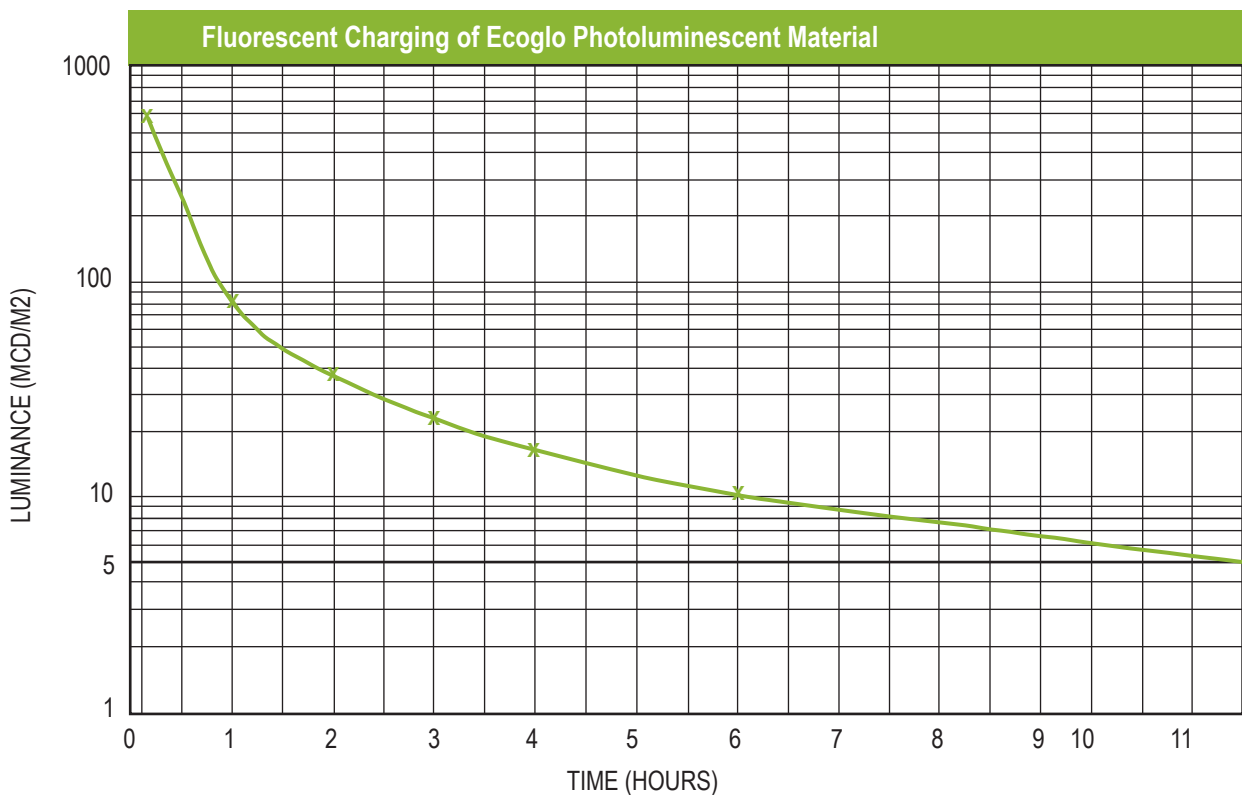

Cleaning

Regular cleaning to remove built up dirt and objects on the products will ensure they will continue performing to expectation.

Note that the photoluminescence will continue performing even after UV exposure or exposure to moisture. The only reason for degradation in the performance of the photoluminescence is a lack of correct cleaning.

1. Vacuuming or brushing with a stiff bristle head (wet or dry) is often enough to keep the products clean. Observation will determine if cleaning is required, however a regular cleaning every 4 to 6 weeks or after particularly heavy use should ensure correct performance.

Note that the glowing strip can also be wiped clean with a wet or dry sponge or cloth.

2. High-pressure water (but not steam cleaning) can also be used to clean the products.

3. Do not use highly alkaline or acidic cleaning agents. The pH of the cleaning agents should be between pH 5 and pH 12. If cleaning agents are applied at more than pH 10, the strips should be rinsed with pH neutral (pH 6 to pH 8) solution afterwards.

Maintenance

Products should be checked annually to ensure the following:

- All products are still in place as at installation and there is no material damage to any of these products.
- All products are clean from general dust build up and any other specific obscuring deposits such as gum or tar.
- All products are clearly visible and have not covered by carpet or other materials.
- All products mark a clear path and have not been obstructed by physical hazards such trolleys, machinery etc.
- All products can be used to provide clear escape path marking and there has been no change to the configuration of the building which renders them unusable.
- All light required to charge Ecoglo photoluminescent products is operating as designed at installation.

Repair and Replacement of Products

If the product is damaged, it must be removed and replaced.

Removal of damaged products:

1. Remove the products.
2. Unscrew the fixers if any.
3. Lever one end of the product away from the concrete step, using a strong screwdriver and/or a small pinch-bar or crow-bar.
4. Continue to lever the product away from the concrete step along its full length until it can be removed by hand.

Preparing for replacement:

1. Use a scraper and/or wire brush to remove all residual adhesive from the concrete.


Replacement:

1. Follow standard installation instructions to install a new product.




E3 Photoluminescent & Non-Slip Strips, 51.0mm width

E3-051 PL & Non-Slip, Yellow E3-061 PL & Non-Slip, Grey E3-071 PL & Non-Slip, Black E3-091 PL & Non-Slip, Brown




N3 Non-Slip Strips, 51.0mm width

N3-050 Non-Slip, Yellow N3-060 Non-Slip, Grey N3-070 Non-Slip, Black N3-090 Non-Slip, Brown




N3 Photoluminescent Non-Slip Strips, 51.0mm width

N3-011
PL Non-Slip




N3 Photoluminescent Strips, 51.0mm width

N3-001
PL Strip




G Photoluminescent Strips

G3-001
PL Strip, 15.5mm width

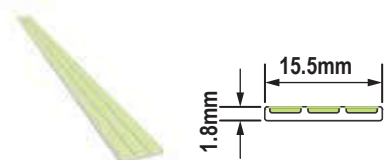


G6-001
PL Strip, 26.0mm width

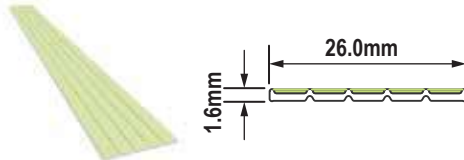


MS50 Photoluminescent Marking Strip

MS50
PL Marking Strip, 51.5mm width

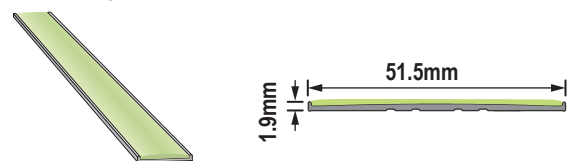

MS50-PS50
PL Marking Strip with PS50 Profile

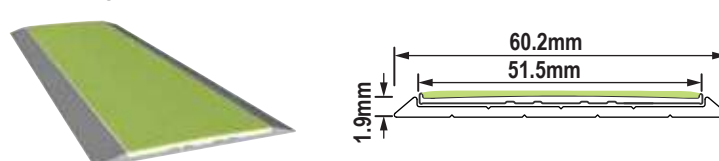

Photoluminescent Marking Strip, Pictogram, 51.5mm width x 500mm length


RMRL5050
PL Marking Strip, Running Man
with Arrow Pointing Right & Left



RMR5050
PL Marking Strip, Running Man
with Arrow Pointing Right



RML5050
PL Marking Strip, Running Man
with Arrow Pointing Left



H Photoluminescent Handrail Strip


H3-001
PL Handrail Strip, 15.5mm width



HEC31
Handrail End Cap



H5-001
PL Handrail Strip, 27.0mm width

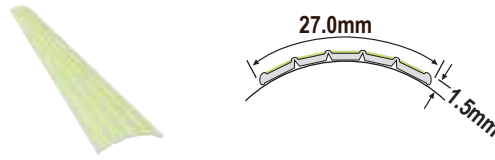

HEC51
Handrail End Cap




Ecoglo Surface Mounted Stair Nosing

2024 Ecoglo Catalogue



F7 Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F7-151 PL & Non-Slip, Yellow F7-161 PL & Non-Slip, Grey F7-171 PL & Non-Slip, Black F7-191 PL & Non-Slip, Brown

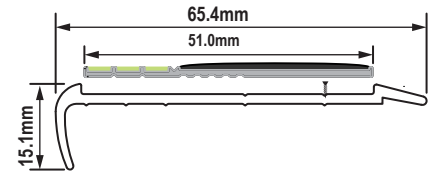


F7 Stair Nosing, Natural Anodised with Non-Slip Strip

F7-150 Non-Slip, Yellow F7-160 Non-Slip, Grey F7-170 Non-Slip, Black F7-170 Non-Slip, Black

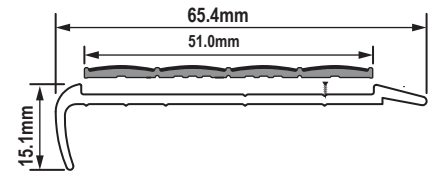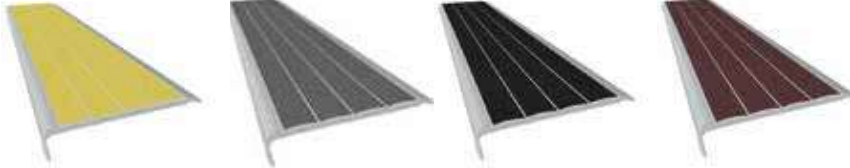


F7 Stair Nosing, Black Anodised with PL & Non-Slip Strip

F7-251 PL & Non-Slip, Yellow F7-261 PL & Non-Slip, Grey F7-271 PL & Non-Slip, Black F7-291 PL & Non-Slip, Brown

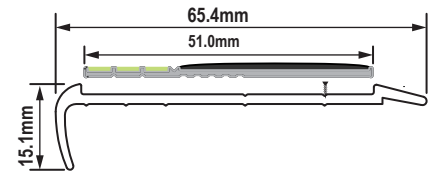


F7 Stair Nosing, Black Anodised with Non-Slip Strip

F7-250 Non-Slip, Yellow F7-260 Non-Slip, Grey F7-270 Non-Slip, Black F7-290 Non-Slip, Brown

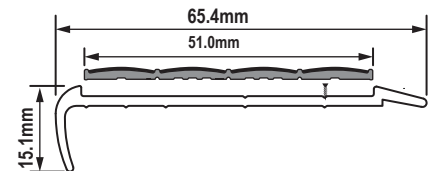


F7 Stair Nosing, Dark Permak Anodised with PL & Non-Slip Strip

F7-351 PL & Non-Slip, Yellow F7-361 PL & Non-Slip, Grey F7-371 PL & Non-Slip, Black F7-391 PL & Non-Slip, Brown

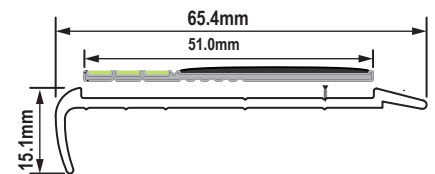

F7 Stair Nosing, Dark Permak Anodised with Non-Slip Strip

F7-350 Non-Slip, Yellow F7-360 Non-Slip, Grey F7-370 Non-Slip, Black F7-390 Non-Slip, Brown

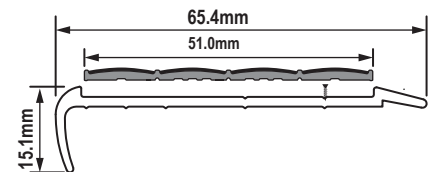

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023.




Ecoglo Surface Mounted Stair Nosing

2024 Ecoglo Catalogue


F8 Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F8-151 PL & Non-Slip, Yellow F8-161 PL & Non-Slip, Grey F8-171 PL & Non-Slip, Black F8-191 PL & Non-Slip, Brown

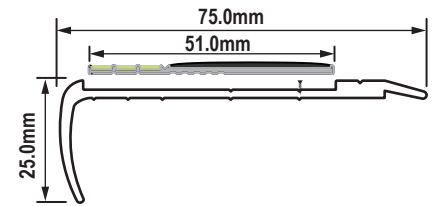


F8 Stair Nosing, Natural Anodised with Non-Slip Strip

F8-150 Non-Slip, Yellow F8-160 Non-Slip, Grey F8-170 Non-Slip, Black F8-170 Non-Slip, Black

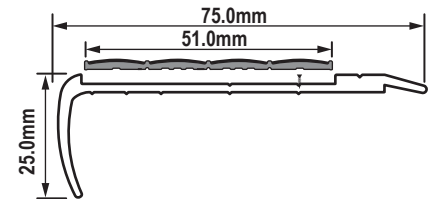


F8 Stair Nosing, Black Anodised with PL & Non-Slip Strip

F8-251 PL & Non-Slip, Yellow F8-261 PL & Non-Slip, Grey F8-271 PL & Non-Slip, Black F8-291 PL & Non-Slip, Brown

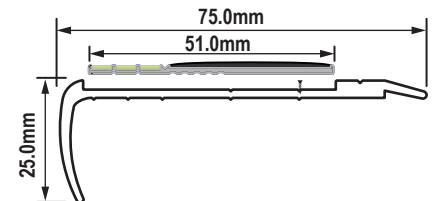


F8 Stair Nosing, Black Anodised with Non-Slip Strip

F8-250 Non-Slip, Yellow F8-260 Non-Slip, Grey F8-270 Non-Slip, Black F8-290 Non-Slip, Brown

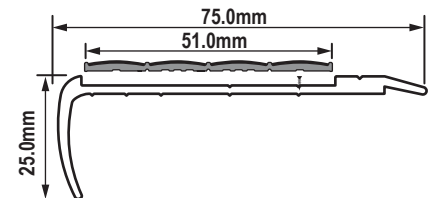


F8 Stair Nosing, Dark Permak Anodised with PL & Non-Slip Strip

F8-351 PL & Non-Slip, Yellow F8-361 PL & Non-Slip, Grey F8-371 PL & Non-Slip, Black F8-391 PL & Non-Slip, Brown

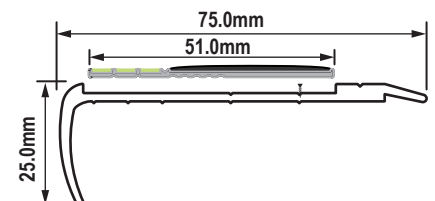

F8 Stair Nosing, Dark Permak Anodised with Non-Slip Strip

F8-350 Non-Slip, Yellow F8-360 Non-Slip, Grey F8-370 Non-Slip, Black F8-390 Non-Slip, Brown

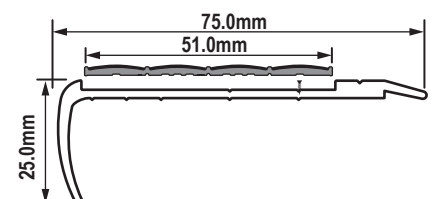

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023.




Ecoglo Surface Mounted Stair Nosing

2024 Ecoglo Catalogue


F12 Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F12-151 PL & Non-Slip, Yellow F12-161 PL & Non-Slip, Grey F12-171 PL & Non-Slip, Black F12-191 PL & Non-Slip, Brown

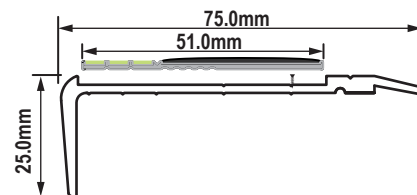


F12 Stair Nosing, Natural Anodised with Non-Slip Strip

F12-150 Non-Slip, Yellow F12-160 Non-Slip, Grey F12-170 Non-Slip, Black F12-190 Non-Slip, Brown

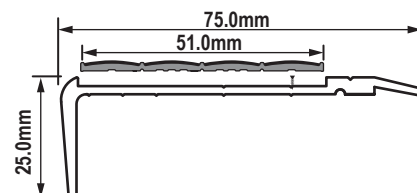


F12 Stair Nosing, Black Anodised with PL & Non-Slip Strip

F12-251 PL & Non-Slip, Yellow F12-261 PL & Non-Slip, Grey F12-271 PL & Non-Slip, Black F12-291 PL & Non-Slip, Brown

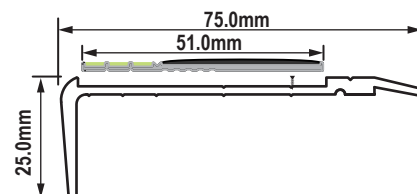


F12 Stair Nosing, Black Anodised with Non-Slip Strip

F12-250 Non-Slip, Yellow F12-260 Non-Slip, Grey F12-270 Non-Slip, Black F12-290 Non-Slip, Brown

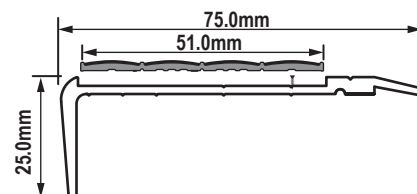


F12 Stair Nosing, Dark Permak Anodised with PL & Non-Slip Strip

F12-351 PL & Non-Slip, Yellow F12-361 PL & Non-Slip, Grey F12-371 PL & Non-Slip, Black F12-391 PL & Non-Slip, Brown

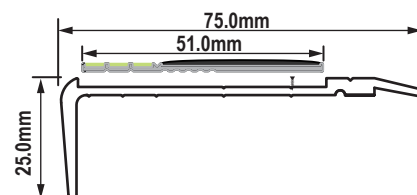

F12 Stair Nosing, Dark Permak Anodised with Non-Slip Strip

F12-350 Non-Slip, Yellow F12-360 Non-Slip, Grey F12-370 Non-Slip, Black F12-390 Non-Slip, Brown

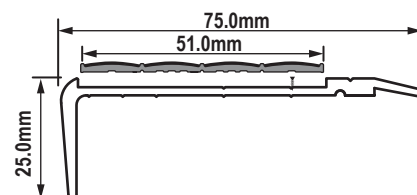

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023.





Ecoglo Surface Mounted Stair Nosing - Carpeted

2024 Ecoglo Catalogue


F7A Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F7A-151 PL & Non-Slip, Yellow F7A-161 PL & Non-Slip, Grey F7A-171 PL & Non-Slip, Black F7A-191 PL & Non-Slip, Brown

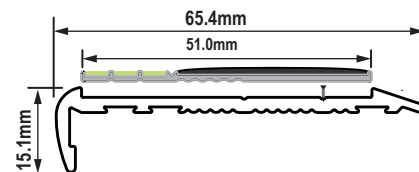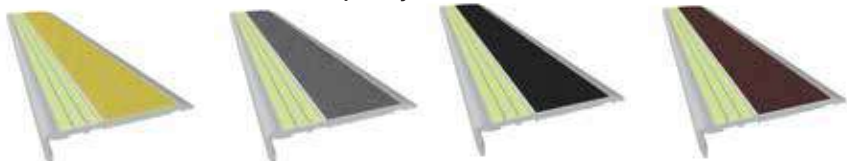


F7A Stair Nosing, Natural Anodised with Non-Slip Strip

F7A-150 Non-Slip, Yellow F7A-160 Non-Slip, Grey F7A-170 Non-Slip, Black F7A-190 Non-Slip, Brown

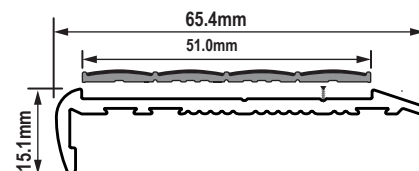


F7A Stair Nosing, Black Anodised with PL & Non-Slip Strip

F7A-251 PL & Non-Slip, Yellow F7A-261 PL & Non-Slip, Grey F7A-271 PL & Non-Slip, Black F7A-291 PL & Non-Slip, Brown

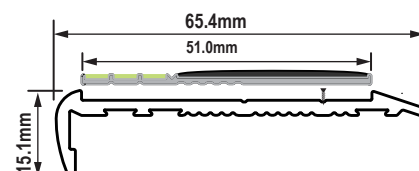


F7A Stair Nosing, Black Anodised with Non-Slip Strip

F7A-250 Non-Slip, Yellow F7A-260 Non-Slip, Grey F7A-270 Non-Slip, Black F7A-290 Non-Slip, Brown

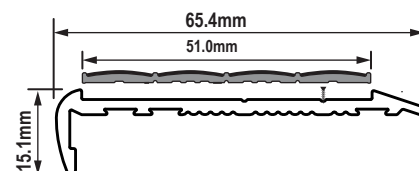


F7A Stair Nosing, Dark Permak Anodised with PL & Non-Slip Strip

F7A-351 PL & Non-Slip, Yellow F7A-361 PL & Non-Slip, Grey F7A-371 PL & Non-Slip, Black F7A-391 PL & Non-Slip, Brown

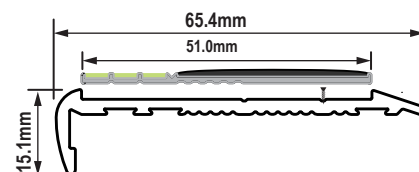

F7A Stair Nosing, Dark Permak Anodised with Non-Slip Strip

F7A-350 Non-Slip, Yellow F7A-360 Non-Slip, Grey F7A-370 Non-Slip, Black F7A-390 Non-Slip, Brown

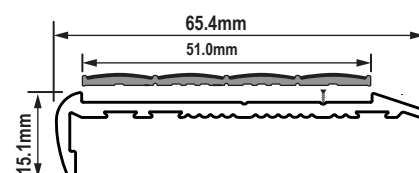

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023.



Ecoglo Surface Mounted Stair Nosing - Carpeted

2024 Ecoglo Catalogue

F12A Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F12A-151

PL & Non-Slip, Yellow



F12A-161

PL & Non-Slip, Grey




F12A-171

PL & Non-Slip, Black



F12A-191

PL & Non-Slip, Brown

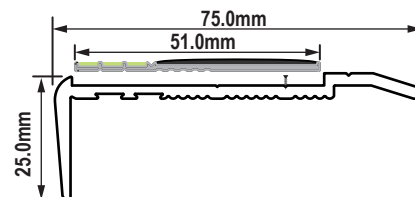

F12A Stair Nosing, Natural Anodised with Non-Slip Strip

F12A-150

Non-Slip, Yellow



F12A-160

Non-Slip, Grey




F12A-170

Non-Slip, Black



F12A-190


Non-Slip, Brown

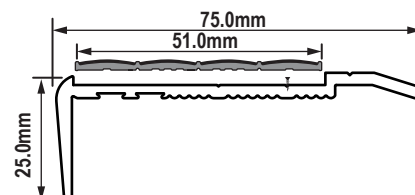

F12A Stair Nosing, Black Anodised with PL & Non-Slip Strip

F12A-251

PL & Non-Slip, Yellow



F12A-261

PL & Non-Slip, Grey




F12A-271

PL & Non-Slip, Black



F12A-291

PL & Non-Slip, Brown

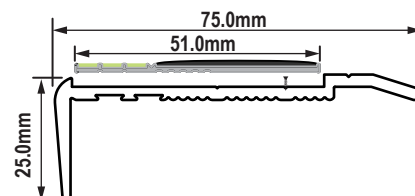

F12A Stair Nosing, Black Anodised with Non-Slip Strip

F12A-250

Non-Slip, Yellow



F12A-260

Non-Slip, Grey




F12A-270

Non-Slip, Black



F12A-290

Non-Slip, Brown

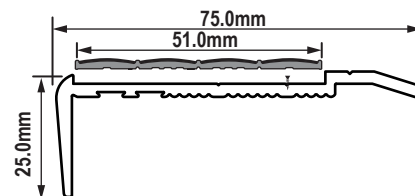

F12A Stair Nosing, Dark Permak Anodised with PL & Non-Slip Strip

F12A-351

PL & Non-Slip, Yellow



F12A-361

PL & Non-Slip, Grey




F12A-371

PL & Non-Slip, Black



F12A-391

PL & Non-Slip, Brown

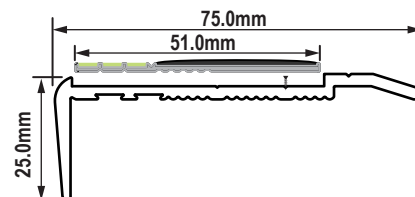

F12A Stair Nosing, Dark Permak Anodised with Non-Slip Strip

F12A-350

Non-Slip, Yellow



F12A-360

Non-Slip, Grey




F12A-370

Non-Slip, Black



F12A-390

Non-Slip, Brown

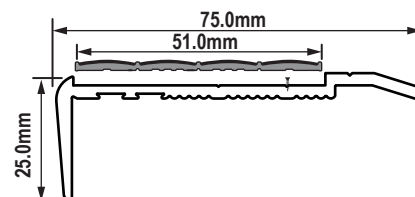

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023.




Ecoglo Cast In Place Stair Nosing

2024 Ecoglo Catalogue


F83 Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F83-151 PL & Non-Slip, Yellow F83-161 PL & Non-Slip, Grey F83-171 PL & Non-Slip, Black F83-191 PL & Non-Slip, Brown

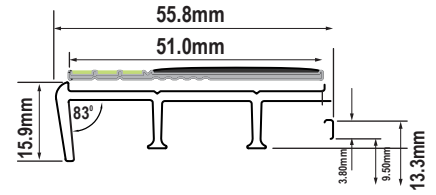


F83 Stair Nosing, Natural Anodised with Non-Slip Strip

F83-150 Non-Slip, Yellow F83-160 Non-Slip, Grey F83-170 Non-Slip, Black F83-190 Non-Slip, Brown

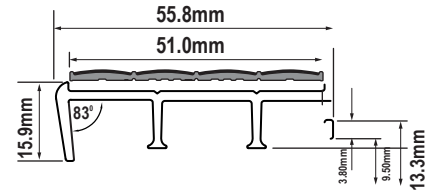


F90 Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F90-151 PL & Non-Slip, Yellow F90-161 PL & Non-Slip, Grey F90-171 PL & Non-Slip, Black F90-191 PL & Non-Slip, Brown

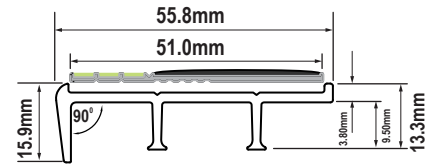


F90 Stair Nosing, Natural Anodised with Non-Slip Strip

F90-150 Non-Slip, Yellow F90-160 Non-Slip, Grey F90-170 Non-Slip, Black F90-190 Non-Slip, Brown

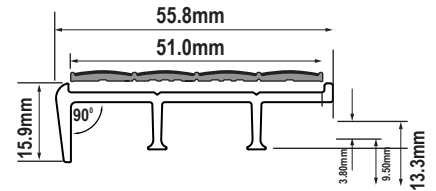


F55 Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F55-151 PL & Non-Slip, Yellow F55-161 PL & Non-Slip, Grey F55-171 PL & Non-Slip, Black F55-191 PL & Non-Slip, Brown

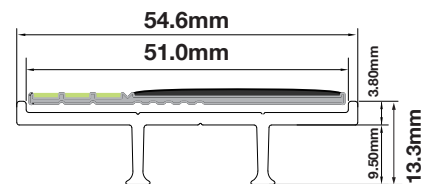

F55 Stair Nosing, Natural Anodised with Non-Slip Strip

F55-150 Non-Slip, Yellow F55-160 Non-Slip, Grey F55-170 Non-Slip, Black F55-170 Non-Slip, Black

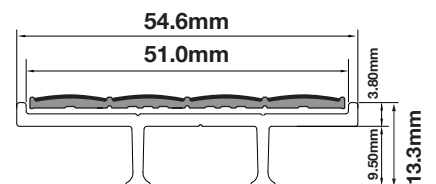

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023.



Ecoglo Recess Stair Nosing

2024 Ecoglo Catalogue

F83R Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F83R-151

PL & Non-Slip, Yellow



F83R-161

PL & Non-Slip, Grey




F83R-171

PL & Non-Slip, Black



F83R-191

PL & Non-Slip, Brown

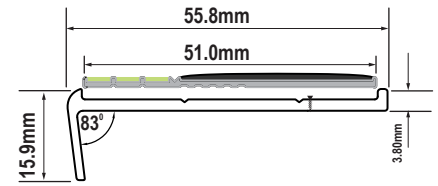

F83R Stair Nosing, Natural Anodised with Non-Slip Strip

F83R-150

Non-Slip, Yellow



F83R-160

Non-Slip, Grey




F83R-170

Non-Slip, Black



F83R-190

Non-Slip, Brown

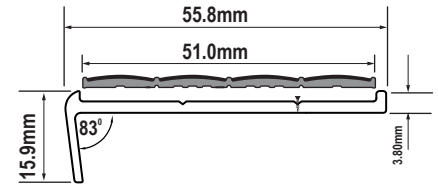

F90R Stair Nosing, Natural Anodised with PL & Non-Slip Strip

F90R-151

PL & Non-Slip, Yellow



F90R-161

PL & Non-Slip, Grey




F90R-171

PL & Non-Slip, Black



F90R-191

PL & Non-Slip, Brown

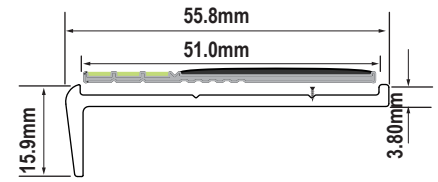

F90R Stair Nosing, Natural Anodised with Non-Slip Strip

F90R-150

Non-Slip, Yellow



F90R-160

Non-Slip, Grey




F90R-170

Non-Slip, Black



F90R-170

Non-Slip, Black

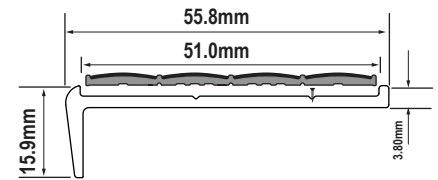

You can use Ecoglo Stair Nosing with Nosing Strip E Series or N Series to comply with BCA Code on Accessibility in The Built Environment 2019 and Fire Code 2023



EXIT



Code	Sign Definition	Sign Size	Viewing Distance
S20-EX2312-12m	Exit straight on from here	230mm x 133mm	12 metre
S20-EX2916-16m	Exit straight on from here	290mm x 162mm	16 metre
S20-EX4223-24m	Exit straight on from here	420mm x 230mm	24 metre

Pictogram, Running Man with Arrow Pointing Right



Code	Sign Definition	Sign Size	Viewing Distance
S20-RMR2312-12m	Exit to Right from here	230mm x 133mm	12 metre
S20-RMR2916-16m	Exit to Right from here	290mm x 162mm	16 metre
S20-RMR4223-24m	Exit to Right from here	420mm x 230mm	24 metre

Pictogram, Running Man with Arrow Pointing Left



Code	Sign Definition	Sign Size	Viewing Distance
S20-RML2312-12m	Exit to Left from here	230mm x 133mm	12 metre
S20-RML2916-16m	Exit to Left from here	290mm x 162mm	16 metre
S20-RML4223-24m	Exit to Left from here	420mm x 230mm	24 metre

Pictogram, Running Man with Arrow Pointing Right and Left



Code	Sign Definition	Sign Size	Viewing Distance
S20-RMRL2312-12m	Exit to Right or Left from here	230mm x 133mm	12 metre
S20-RMRL2916-16m	Exit to Right or Left from here	290mm x 162mm	16 metre
S20-RMRL4223-24m	Exit to Right or Left from here	420mm x 230mm	24 metre

Pictogram, Running Man



Code	Sign Definition	Sign Size	Viewing Distance
S20-RM2312-12m	Exit straight on from here	230mm x 133mm	12 metre
S20-RM2916-16m	Exit straight on from here	290mm x 162mm	16 metre
S20-RM4223-24m	Exit straight on from here	420mm x 230mm	24 metre

Emergency Exit Only - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-EE3113-6m	Use this door only to exit in an emergency	310mm x 135mm	6 metre
S20-EE5419-12m	Use this door only to exit in an emergency	545mm x 195mm	12 metre
S20-EE6924-16m	Use this door only to exit in an emergency	695mm x 245mm	16 metre

Customised Signs are available upon request.

You can use Ecoglo Photoluminescent Signs to comply with Fire Code 2023 Clause 8.1.8 Photoluminescent Marking.



NO EXIT - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-NE3613-8m	Do not use this door to exit in an emergency	365mm x 135mm	8 metre
S20-NE4616-12m	Do not use this door to exit in an emergency	465mm x 160mm	12 metre

Pictogram, Evacuation Lift - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-EL2421-12m	Evacuation Lift here	248mm x 218mm	12 metre
S20-EL3127-16m	Evacuation Lift here	318mm x 278mm	16 metre
S20-EL4539-24m	Evacuation Lift here	459mm x 399mm	24 metre

Pictogram, Evacuation Lift on Right - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-ELR3621-12m	Evacuation Lift on Right	369mm x 218mm	12 metre
S20-ELR4827-16m	Evacuation Lift on Right	480mm x 278mm	16 metre
S20-ELR7039-24m	Evacuation Lift on Right	702mm x 399mm	24 metre

Pictogram, Evacuation Lift on Left - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-ELL3621-12m	Evacuation Lift on Left	369mm x 218mm	12 metre
S20-ELL4827-16m	Evacuation Lift on Left	480mm x 278mm	16 metre
S20-ELL7039-24m	Evacuation Lift on Left	702mm x 399mm	24 metre

Bracket, Flag Mount, Architectural, comes with flag mount plate and cover



Code	Sign Size
BR2-162-S20-16m	290mm x 162mm

** Brackets can take one sign or two signs back to back

* Non-Stock Item

Bracket, Ceiling Mount, Architectural, comes with ceiling mount plate and cover



Code	Sign Size
BR2-290-S20-16m	290mm x 162mm

** Brackets can take one sign or two signs back to back

* Non-Stock Item

Customised Signs are available upon request.

You can use Ecoglo Photoluminescent Signs to comply with Fire Code 2023 Clause 8.1.8 Photoluminescent Marking.



Pictogram, Fire Extinguisher - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-FERB1313-12m	Fire Extinguisher	130mm x 130mm	12 metre
S20-FERB1616-16m	Fire Extinguisher	162mm x 162mm	16 metre
S20-FERB2323-24m	Fire Extinguisher	230mm x 230mm	24 metre

Pictogram, Fire Hose - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-FHRB1313-12m	Fire Hose	130mm x 130mm	12 metre
S20-FHRB1616-16m	Fire Hose	162mm x 162mm	16 metre
S20-FHRB2323-24m	Fire Hose	230mm x 230mm	24 metre

Pictogram, Fire Alarm - Custom Run Product



Code	Sign Definition	Sign Size	Viewing Distance
S20-FARB1313-12m	Fire Alarm	130mm x 130mm	12 metre
S20-FARB1616-16m	Fire Alarm	162mm x 162mm	16 metre
S20-FARB2323-24m	Fire Alarm	230mm x 230mm	24 metre

Pictogram, Push Bar To Open - Custom Run Product




Code	Sign Definition	Sign Size	Viewing Distance
S20-PBGB4510-10m	Push Bar To Open	450mm x 105mm	10 metre
S20-PBLB6012-12m	Push Bar To Open	600mm x 120mm	12 metre

Customised Signs are available upon request.

You can use Ecoglo Photoluminescent Signs to comply with Fire Code 2023 Clause 8.1.8 Photoluminescent Marking.



Access Surface Applied Hazard Tile

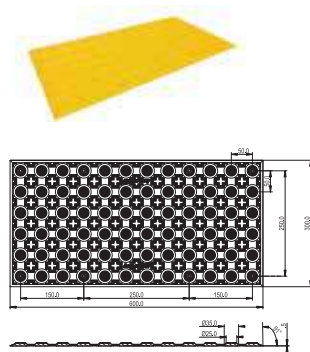


Code	Description	Size
ACC-S-300600-YW	Access Surface Applied Hazard Tile, Yellow	300mm x 600mm
ACC-S-300600-BK	Access Surface Applied Hazard Tile, Black	300mm x 600mm
ACC-S-6001200-YW	Access Surface Applied Hazard Tile, Yellow	1200mm x 600mm
ACC-S-6001200-BK	Access Surface Applied Hazard Tile, Black	1200mm x 600mm
ACC-S-300300-YW	Access Surface Applied Hazard Tile, Yellow	300mm x 600mm
ACC-S-300300-BK*	Access Surface Applied Hazard Tile, Black*	300mm x 600mm*

* Also available in White and Grey Colour
(Custom Run)

* 300mm x 300mm is a
custom run product

Access Cast In Place Hazard Tile - Custom Run Product

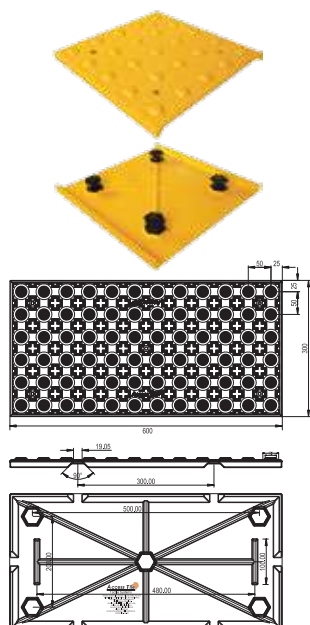

Code	Description	Size
ACC-R-300600-YW	Access Cast In Place Hazard Tile, Yellow	300mm x 600mm
ACC-R-300600-BK	Access Cast In Place Hazard Tile, Black	300mm x 600mm
ACC-R-300300-YW	Access Cast In Place Hazard Tile, Yellow	300mm x 600mm
ACC-R-300300-BK	Access Cast In Place Hazard Tile, Black	300mm x 600mm

* Also available in White and Grey Colour



Fire Code 2023 Clause 8.1.8 Photoluminescent marking

a. In all buildings, except Purpose Groups I & II, photoluminescent marking/tape to guide occupants along evacuation routes to appropriate exit shall be provided:

- (1) along internal walls and/or floors of the exit staircase, smoke-stop lobby and fire-fighting lobby;
- (2) on the doors of smoke-stop lobby, fire-fighting lobby and exit staircase;
- (3) along corridor with exit directional signs.


b. The width of photoluminescent marking or tape shall be at least 50mm and be placed at low level. The bottom of the low level sign shall not be less than 150mm or more than 400mm above the floor level.

c. Omission of photo luminescent marking/tape is permitted on the following conditions:


- (1) the emergency power supply of the exit lightings, exit signs and directional signs in the above locations shall be self contained battery pack (single point system) in compliance with SS 563 or central battery supply backed up by stand-by generator;
- (2) there shall be at least 2 emergency luminaries in the smoke-stop lobby, fire-fighting lobby and corridor with exit directional signs, such that no part of such spaces shall be left in total darkness should there be failure of anyone of the emergency luminaries; and
- (3) there shall be at least one emergency luminaire at every exit staircase landing.

Ecoglo will be happy to assist you with a solution to comply with Fire Code 2023.


(a) Along internal walls and/or floors of the exit staircase, smoke-stop lobby and fire-fighting lobby

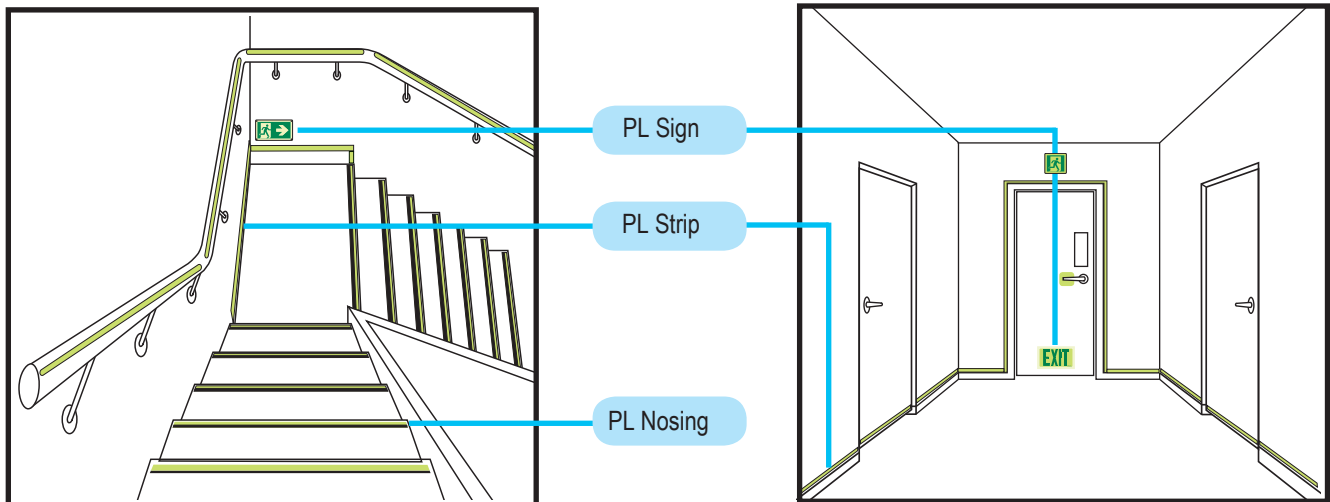

(b) On the doors of smoke-stop lobby, fire-fighting lobby and exit staircase

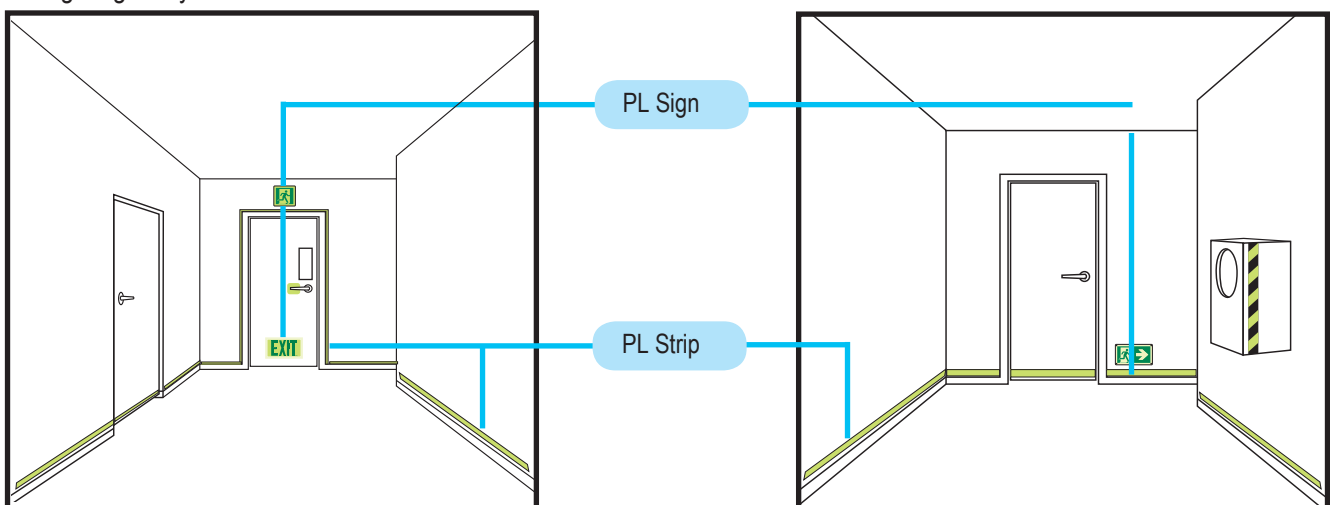

(c) Along corridor with exit directional signs

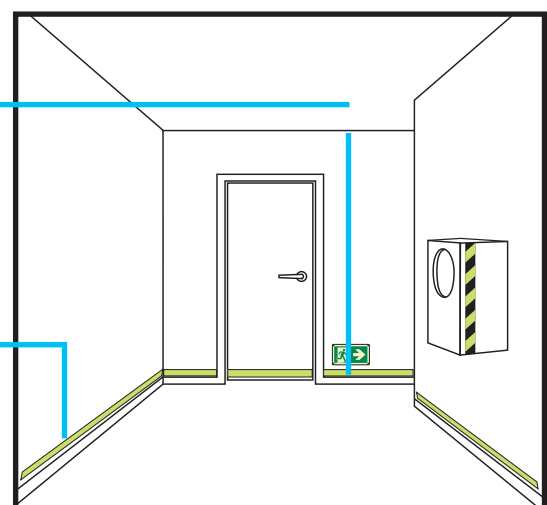

Customised Signs are available upon request.

You can use Ecoglo Photoluminescent Signs to comply with Fire Code 2023 Clause 8.1.8 Photoluminescent Marking.



Compliance Guide - BCA Code on Accessibility in the Built Environment 2019

2024 Ecoglo Catalogue



BCA Code on Accessibility in The Built Environment 2019

Clause 4.11.2.2

4.11.2.3 All steps shall be fitted with non-slip nosing strips between 50mm and 65mm in width with permanent contrasting colours.

Note: The contrasting colour of the nosing is meant to ensure that the tread edge is clearly visible in descent.


When installed, please ensure the height of a riser shall not be more than 175mm. Riser height measured from the step to the top of the nosing of the next step shall not be more than 175mm

Clause 4.11.3.1

4.11.3.1 Detectable warning surfaces shall:

- (a) be provided at the top, bottom and intermediate landings leading to another path of travel;
- (b) extend the full width of the stairs for a depth of 600mm commencing 300mm back from the stairs as shown in Figure 45 (a); and
- (c) consist of flooring material that is:
 - (i) contrasting in colour with the surrounding flooring material; and
 - (ii) of a different texture from the surrounding flooring material.

Ecoglo will be happy to assist you with a solution to comply with BCA Code on Accessibility in The Built Environment 2019

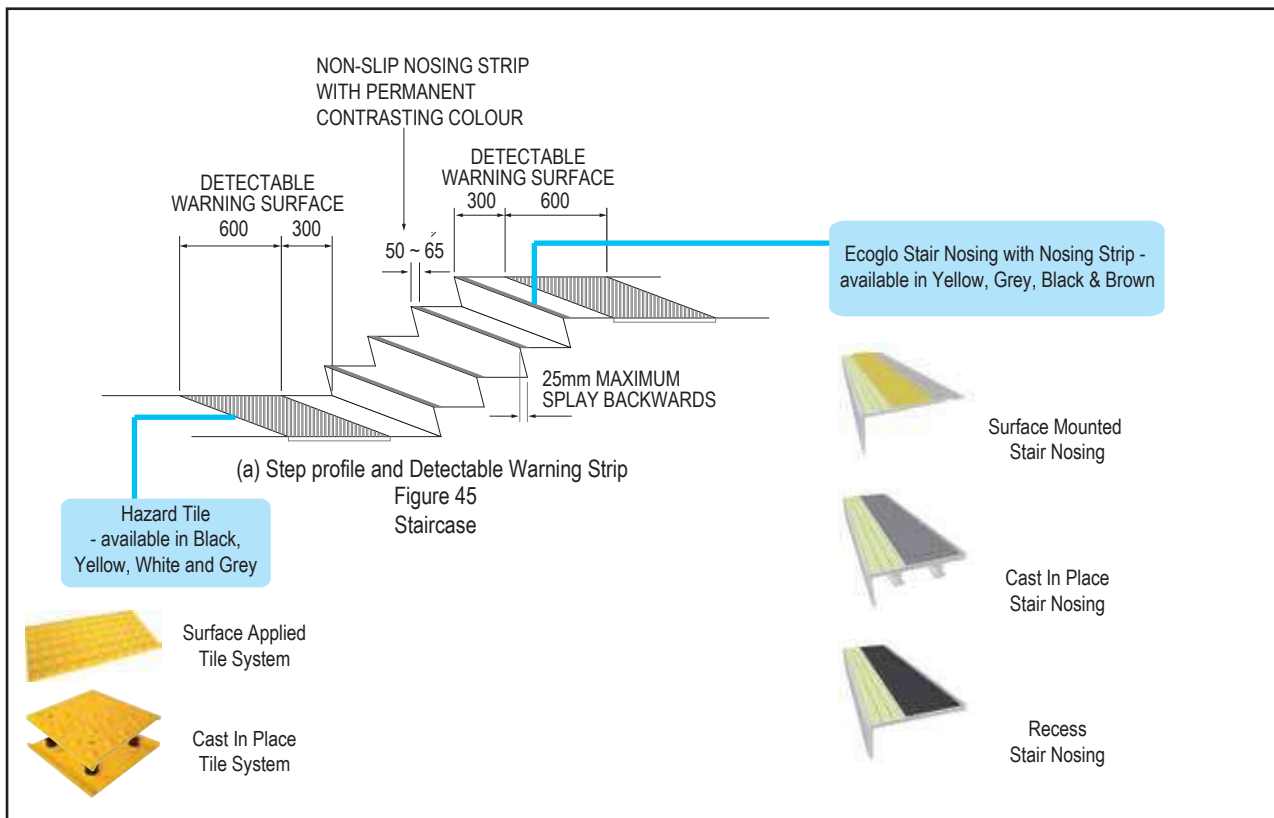

Scan to Chat



Download Catalogue



 **ecoglo®** | VISIBLY BETTER

For further information, please contact Ecoglo Pte Ltd

address : 111 North Bridge Road #17-06 Peninsula Plaza
Singapore 179098

phone : 6858 3530

web : www.ecoglo.sg

email : info@ecoglo.sg

UEN No. : 200600119E

GST Reg. No. : 20-0600119E